



A WATTS Brand

6543

Soap Dispenser

- Tank Type Horizontal **Bradlex**<sup>®</sup>
- Surface-Mounted
- ADA Compliant

### Product Materials

**BODY:** 20 gauge stainless steel with exposed surfaces in architectural satin finish.  
**BACK:** 20 gauge stainless steel; welded to the body.  
**WALL PLATE:** stainless steel.  
**SOAP VALVE:** Black ABS plastic mechanism.

### Capacity

40-oz. liquid soap.

### Operation

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, and antiseptic solutions with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.

- Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.

### Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

### Guide Specification

Surface-mounted liquid soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant liquid soap valve. Capacity: 40-oz. liquid soap. Requires less than 5 lbs. of force to dispense soap.


**Overall dimensions: 8-3/16"W x 4-13/16"H x 2-7/8"D.**

### ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

### Service Kit

Soap Valve - P15-449

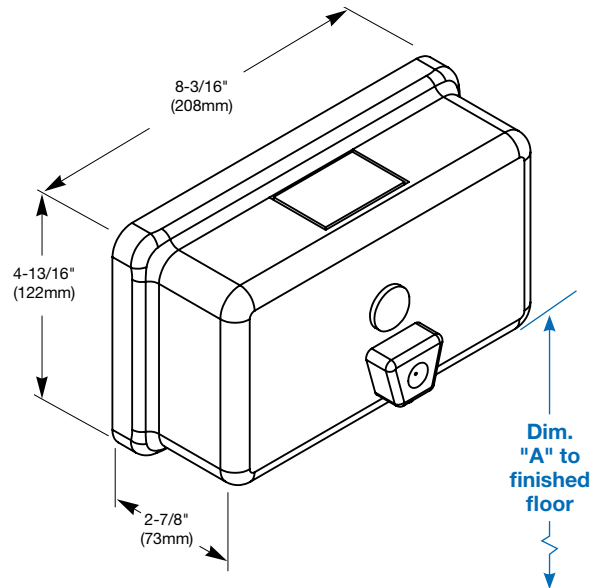

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	43¼" (1099mm)	38⅝" (975mm)
	38" (965mm)	41¼" (1048mm)	36⅝" (924mm)
	36" (914mm)	39¼" (997mm)	34⅝" (873mm)
	34" (864mm)	37¼" (946mm)	32⅝" (822mm)
<b>Rough wall opening:</b>			
Surface-Mount:	No rough opening, see overall dimensions		