



A WATTS Brand

SNA-Series - Safety Shower Heaters

Tankless Water Heating Solutions

- 36 - 144 kW (122,800 - 491,300 BTUs)
- Temperature overshoot purge system
- Certified lead-free design
- NEMA 4 enclosure standard
- ASME and NB Certified options available
- New & improved pressure drop advantage
- Dual flow activation
- Variable temp heat exchanger
- Liquid-cooled solid state relays
- Internal fusing (included) adds safety and permits single power connection
- Controller-locked temperature setting, output fixed at 80°F (27°C)
- Meets ANSI/ISEA Z358.1 standards
- Emergency stop button
- Door cutoff switch



Standard Equipment

Tankless Water Heating Specifications

Bradley® Tankless Water Heaters **Powered by Keltech™** provide warm water intended to supply safety fixtures. The heaters uniquely perform in applications with low line pressure, while still accommodating ANSI standard flow rates. Standard units: activation flow ≥ 1.5 gpm. The durable components withstand higher pressures which result in longer service life, while ensuring the delivery of precise output temperature. Durable components withstand power abnormalities found in industrial environments and ensure tepid water standards are never exceeded (100°F) with its three-tier anti-scald protection and hot water purge. SNA-Series units are also suited to applications with 3 Phase Delta 480V or 600V, 50/60 Hz. The heat exchanger features o-ring seals that out last typical gasket construction. 1-1/4" NPT female inlet and outlet connections. Our tankless systems do not require the installation of an emergency thermostatic mixing valve.

Construction

Temperature Controller

The PID temperature controller is more energy efficient and reliable than traditional microprocessors using staged elements. Power is infinitely variable, with no fixed inputs. The PID controller makes it possible to modulate the amount of power applied to the elements while also dispersing the required power evenly across all elements. This unique feature increases the product's life cycle.

Heating Element

Each heater features a heavy duty, low watt density, incoloy 800 sheathed resistive element. The heater design ensures greater protection, durability and resistance to scaling from hard water because water is only heated when flowing; this means sediment will not collect in the heat exchanger.

Solid State Relays

The liquid cooled solid state relays provide silent switching, which has a fast response and works in conjunction with the PID controller to infinitely modulate and add to the life of the heater.

Electrical

The SNA-Series requires only one service feed per unit. Includes internal fusing as standard. Internal fusing provides superior protection so the incoming circuit can be higher than 48 amps (NEC). Each heating element is protected by fusing.

Cabinet Enclosure

The floor-mounted standard cabinet enclosure is NEMA 4 rated and made from 14-gauge mild steel and powder coated with ANSI 61 gray, corrosive resistant paint. The NEMA 4X enclosures are corrosion resistant for harsher environments and made from 16-gauge 304 stainless steel. The NEMA 4X enclosure can also be specified with 316 stainless steel. Additional service access panel located on top of cabinet enclosure.

Independent Safeties

Each heater has three-tier anti-scald protection and hot water evacuation (overshoot purge protection). The controller alarm sends a signal to disconnect power to the elements if the temperature reaches 90°F (32°C). The internal thermostat with auto reset high limit switch ensures that when the temperature limit is reached (factory preset at 80°F/27°C), the unit will power down a bank of elements; when the temperature returns to the set point, power is restored. The surface mounted bi-metal thermostat with manual reset acts as a fail-safe and must be manually reset before power can be restored to the elements if the temperature limit is exceeded.

TepidGuard™ is an anti-scald feature, standard on all SNA-Series Safety Shower Heaters. This overshoot purge will automatically open and purge excess temperature water. This feature actively monitors temperature within the heater while operational. It also passively monitors water temperature while the heater is inactive. This is beneficial for outdoor installations where sun and weather can cause water temperature to exceed ANSI standards.

Temperature Safety Values:

Internal thermostat with auto reset high limit switch: 95°F (35°C)

Surface mounted bi-metal thermostat with manual reset: 100°F (38°C)

Overshoot purge: 95°F (35°C)

Dual Flow Activation

Bradley safety shower heaters have a dual flow activation. The low flow activation is used with eyewashes, eye/face washes, and drench hoses. The high flow activation is for safety shower usage. This allows just the right capacity of heated water to be used for each application.

Product Compliance



Lead-Free

Products marked with the Lead-Free logo comply with the Safe Drinking Water Act (SDWA) requirements of a weighted average of less than 0.25% lead content on wetted surfaces of pipes, pipe fittings, plumbing fittings, and fixtures.



ETL listed to UL499

ETL listed to UL 50E

ETL listed to NFPA 496 (Requires EXP2CFPM Option)


cETL listed to CSA-C22.2 No. 88



Standard product selections contained within this document are third party

CERTIFIED to NSF/ANSI 372 meeting the Lead-Free content requirement. Any

product configured with custom options will be COMPLIANT with NSF/ANSI 372 meeting the Lead-Free content requirement.



ASME Certification available. Bradley units 58kW (200,000 btu) and higher are the only electric tankless water heaters National Board certified with the HLW stamp (Requires HLW Option).

Compliant to NEC/NFPA 70 and Canadian Electrical Code C22.1.

Protected by one or more of the following patents: 7,007,316 B2; 7,243,381 B2.



A WATTS Brand

SNA-Series - Safety Shower Heaters

Tankless Water Heating Solutions

Product Options

Fused Disconnect

Internal fused disconnect interlocks with enclosure door when energized, prohibiting access to a live cabinet. Select the FDS option for an additional level of safety and convenience at the heater location.

Alarm Selections

Two levels of building communication alarm options. The AL3 option provides dry contacts that open to signal flow >1.5 gpm has activated the heater. The AL3-SL option provides these dry contacts and additionally activates a local audible and visual alarm on the heater. Alarms activate at 1.5 gpm flow or greater.

Freeze Protection

The standard ambient temperature is 33°F (0.6°C). For environments lower than 33°F, a freeze protection package is available. ENHT offers protection to -20°F (-28°C). The ENHT30 offers protection to -30°F (-34°C). Each level of protection utilizes the normal heater supply voltage. No additional dedicated circuit to the unit is required during field installation. Freeze protection (ENHT option) includes an internally insulated NEMA 4/4X enclosure and thermostatically controlled forced air heater to maintain internal temperatures above freezing.

ENHT options also include a connection point for DCS monitoring. In the event of a power interruption or ENHT system failure when internal enclosure temperatures reach 40°F (4.4°C) or lower, the unit will notify a facilities control/monitoring system that the unit is unable to maintain freeze protection. Regardless of state of power to the unit, this warning notifies maintenance personnel and provides an opportunity to correct the condition before any damage occurs to the unit.

Remote Emergency Stop

RES is an internal communication option that is wired into a Building Management System. Allows power to be removed remotely from the heat exchanger.

Ground Fault

Optional equipment protection ground fault senses leakage current to ground >1 Amp. In the event a fault is detected, this device will terminate the high voltage power supply to heating elements and disable operation of the unit. Fault status is communicated EXTERNALLY at the control interface. Personnel may also test the Ground Fault system and reset any nuisance trips without opening the cabinet.

Continuous Flow Explosion Proof Purge System

The EXP2CFPM option makes heaters compliant for classified areas; Class 1, Division 2, Groups A-D, T5. The Purge System requires a supply of clean instrument air or inert gas (provided by installer). This supply maintains a positive internal pressure and prevents the enclosure from filling with flammable gasses, dusts or vapors from the ambient environment. In addition to manufacturer certifications on the purge system, all finished product with EXP2CFPM are independently tested and 3rd party certified to comply with NFPA 496.

ASME Heat Exchanger

Bradley offers any product above 200,000 btu equivalent (58kw+) the option to be fitted with internal plumbing certified to Section IV of the ASME Boiler and Pressure Vessel Code - an industry exclusive certification. HLW certification represents not only an approved design and method of construction, but an intensively audited construction and documentation process that concludes with a pressure test witnessed by an ASME official. Upon completion of this process, each heat exchanger is issued a unique serial number for registration in the National Board. This information is supplied with the unit via Form "HLW-6 Manufacturer Data Report" for verification and reference by local inspection officials. The HLW options also include additional features such as dry-fire protection, an auto bleed valve, stainless steel bulkheads and boiler drain valves, adding an extra level of quality and durability to the heaters.

Other Product Options

For additional heater options and installation accessories, reference the appropriate section at the end of this document.

Electrical Specifications for the Heater (3-Phase)



All internal fuses necessary for installation are included with the unit.

Capacity (kW)	Voltage	Maximum Amperage	Minimum AWG Wire Size
36	480	43	6
36	600	35	8
54	480	65	4
54	600	52	6
63	480	76	4
63	600	61	4
72	480	87	3
72	600	69	4
108	480	132	1
108	600	104	2
126	480	152	1/0
126	600	121	1
144	480	174	2/0
144	600	139	1/0

Related Products

[Halo S19314](#)
[Combination](#)
[Drench Shower and](#)
[Eyewash](#)



Complies with ANSI/ISEA Z358.1

SNA-Series Pressure Drop Advantage

GPM	1.5	2	3	4	5	6	8	10	15	20	25	30	35	40	45	50
36-63 kW PSI	0.0	0.0	0.1	0.2	0.2	0.3	0.6	0.9	2.0	3.6	5.5	7.9	10.8	14.0	17.6	21.7
72-144 kW PSI	0.0	0.0	0.1	0.2	0.3	0.4	0.8	1.2	2.6	4.7	7.3	10.4	14.2	18.5	23.3	28.7
L-MIN	5.7	7.6	11.3	15.1	18.9	22.7	30.2	37.8	56.7	75.6	94.5	113.4	132.5	151.2	170.1	189
36-63 kW BAR	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.4	0.5	0.7	1.0	1.2	1.5	
72-144 kW BAR	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.5	0.7	1.0	1.3	1.6	2.0



A WATTS Brand

SNA-Series - Safety Shower Heaters


Tankless Water Heating Solutions

SNA-Series - Dimensions




Select product options shown. Other options available.

(mm)

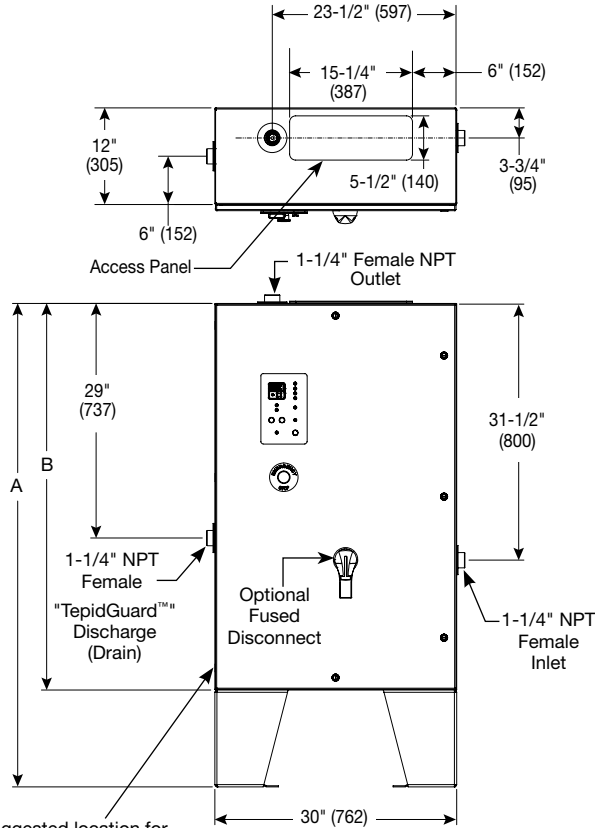

Suggested location for power entrance.
Holes provided by installer.

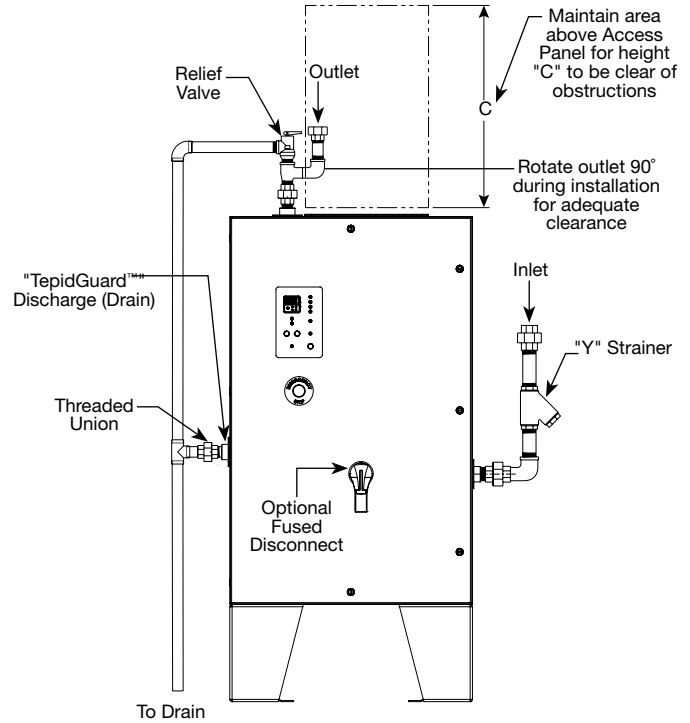

Suggested Installation Configuration
Components provided by installer unless otherwise specified.
Reference the product options sections or contact your local Bradley Representative for product options.

	Dim. "A"	Dim. "B"	Dim. "C"
36kW	60"(1524)	48"(1219)	36"(914)
54kW	60"(1524)	48"(1219)	36"(914)
63kW	72"(1829)	60"(1524)	48"(1219)
72kW	60"(1524)	48"(1219)	36"(914)
108kW	60"(1524)	48"(1219)	36"(914)
126kW	72"(1829)	60"(1524)	48"(1219)
144kW	72"(1829)	60"(1524)	48"(1219)



A WATTS Brand

SNA-Series - Safety Shower Heaters

Tankless Water Heating Solutions

kW Calculator

SNA-Series (kW): 36, 54, 63, 72, 108, 126, 144

		Temperature Δ°F (°C)																											
		10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°	140°	
		(6°)	(8°)	(11°)	(14°)	(17°)	(19°)	(22°)	(25°)	(28°)	(31°)	(33°)	(36°)	(39°)	(42°)	(44°)	(47°)	(50°)	(53°)	(56°)	(58°)	(61°)	(64°)	(67°)	(69°)	(72°)	(75°)	(78°)	
Flow	GPM L-MIN	1.5 5.7	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	2 7.6	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	3 11.3	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	4 15.1	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	5 18.9	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	6 22.7	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	7 26.5	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	8 30.2	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	9 34.0	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	10 37.8	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	12 45.4	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	15 56.7	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	20 75.6	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	25 94.5	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	30 113.4	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	35 132.3	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
	40 151.2	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	
45 170.1	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36		
50 189.0	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36	36		

ASME Certification Available



Sizing for the proper flow rate is important. If the temperature rise requirements exceed a single SNA model, consider using multiple SNA-Series units. Please contact your Bradley Representative for additional product information.

How to Size a Heater

- Calculate Delta-T (ΔT).
Set point temp - coldest ground water temp = ΔT ΔT = _____
- Select kW required by using chart or formula below.
Peak demand in GPM x ΔT x .1465 = kW kW = _____
- Confirm voltage and phase available on site. Voltage and Phase = _____
- Confirm minimum flow. Minimum Flow = _____



A WATTS Brand

SNA-Series - Safety Shower Heaters

Tankless Water Heating Solutions

Model	
SNA	SNA-Series - Safety Shower Heater with TepidGuard™
Standard Selections (Must select one from each category)	
Kilowatts	
36 36 kilowatts	72 72 kilowatts 144 144 kilowatts
54 54 kilowatts	108 108 kilowatts
63 63 kilowatts	126 126 kilowatts
AC Power Supply	
3	Three Phase
Voltage	
480 480 Volts	380 380 Volts (down rated from 480V)
600 600 Volts	400 400 Volts (down rated from 480V)
	415 415 Volts (down rated from 480V)
Cabinet Enclosure	
N4	NEMA-4 Enclosure
N4X	NEMA-4X Enclosure - Stainless Steel
N4X316	NEMA-4X Enclosure - 316 Stainless Steel
System Controller	
D	Digital Control

Heaters listed above can be down rated in 380, 400 and 415 volts. Contact your local Bradley Representative for power ratio and effective kW.

Asset Tag	
00	None
01	1 Asset Tag _____
02	2 Asset Tags _____
03	3 Asset Tags _____
04	4 Asset Tag _____
05	5 Asset Tags _____

Verify ASME Code applicability for all installations 58kw (200,000 btu) and higher.

Product Options (Must select one from each category)	
AL3	Distributed Control System Link
AL3-SL	Stack Light with Distributed Control System Link
NONE	None
ENHT	Freeze Protection to -20°F
ENHT30	Freeze Protection to -30°F
NONE	None
EXP2CFPM	Continuous Flow Explosion Proof Class 1/Division 2
NONE	None
FDS *	Internal Fused Disconnect
NONE	None
GF	Ground Fault Package
NONE	None
HLW	ASME Heat Exchanger with Level Sensor (63kW and Higher Only)
NONE	None
RES	Remote Emergency Stop
NONE	None

* Not available with SNA-723/600D

Installation Accessories	
BSPB	Stainless Steel Thread Adapter Converts NPT to BSPB
NONE	None
PR	Pressure and Temperature Relief Valve
PRS	ASME Pressure Relief Valve, Stainless Steel
NONE	None
YS	Y-Strainer
YSS	Y-Strainer, Stainless Steel
NONE	None

Application Attributes (MANDATORY)	
Coldest ground water temperature:	_____
Minimum Flow:	_____
Maximum Flow:	_____
Select set point temperature 60°F - 80°F (factory preset at 80°F/27°C):	_____

Delta T Calculation

Set Point Temperature - Coldest Incoming Water Temperature = Minimum Delta T for Application

Model Number Configuration

SNA-	3	/	D	-	-	-	-	-	-	-
	kW		Volts							
INSTL_ACCESSORY	-	-	-	-	-	-	-	-	-	-

Customer Signoff _____